



FLINT & WALLING


Zoeller Family of Water Solutions

4" 55 GPM • 1 1/2 thru 7 1/2 HP • 3450 RPM • 60 Cycle

HP Size and Model No.	Stages	Phase	Weight		Discharge Pressure PSI	DEPTH TO WATER LEVEL IN FEET - CAPACITIES IN GALLONS PER MINUTE																				Maximum Pressure	
			Pump End	Motor End		20	40	60	80	100	120	140	160	180	200	220	240	260	300	350	400	450	500	550	FL	PSI	
1-1/2 HP 4F55A15 4F55S15	4	1	12	28	0																			135	58		
		3	12	25	20	70	60	71	62	50	36																
2 HP 4F55A20 4F55S20	5	1	14	30	0																			165	71		
		3	14	28	20	74	68	75	69	61	51	42	29														
3 HP* 4F55A30 4F55S30	7	1	16	52	0																			235	101		
		3	16	43	20		75	70	75	71	66	61	55	47	39	31											
5 HP* 4F55A50 4F55S50	11	1	19	69	0																			365	158		
		3	19	53	20			72	69	73	70	68	64	61	57	53	44	30									
7-1/2 HP* 4F55A75 4F55S75	18	3	28	69	0																			600	259		
					20																						

NOTE: Pipe friction loss in drop pipe is not included in chart above. *For 3 HP and above, refer to Franklin handbook for proper flow rates to cool motor.

55 GPM • 1 1/2-7 1/2 HP

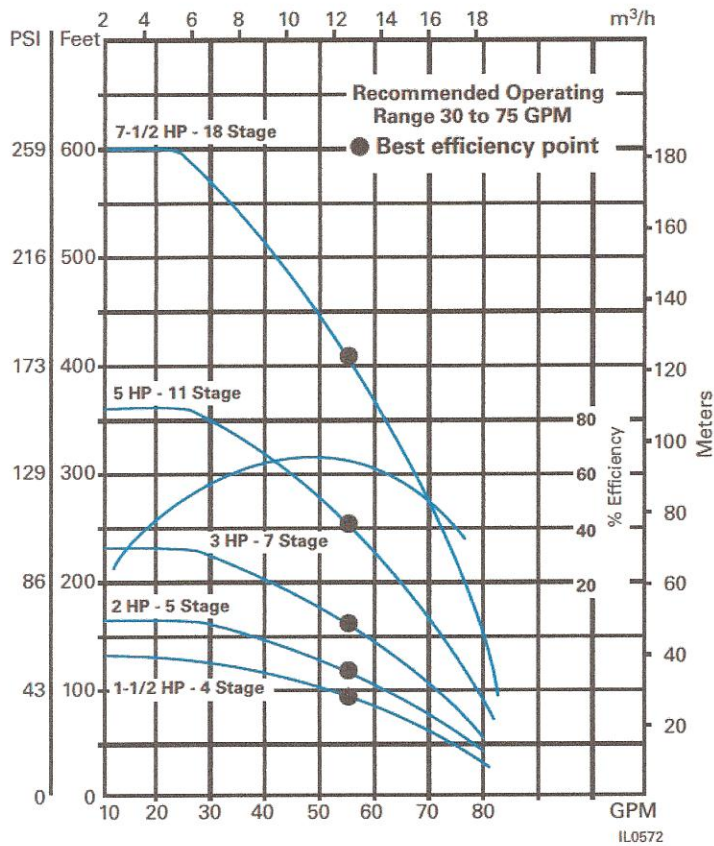

Stainless Steel
2" NPT

Cast Iron
2" NPT

