


LAWN SPRINKLING PUMPS

FW1298
0217
Supersedes
1115

SP SELF PRIMING LAWN SPRINKLING / IRRIGATION PUMPS

- Quick self-priming operation for lawn irrigation
- Flint & Walling's Service Plus motor featuring capacitor start and sealed ball bearings for continuous operation.
- Heavy-duty cast-iron construction
- 115/230 Dual voltage motor
- Easy access drain plug
- 2 in. suction pipe / 1-1/2 in. discharge pipe

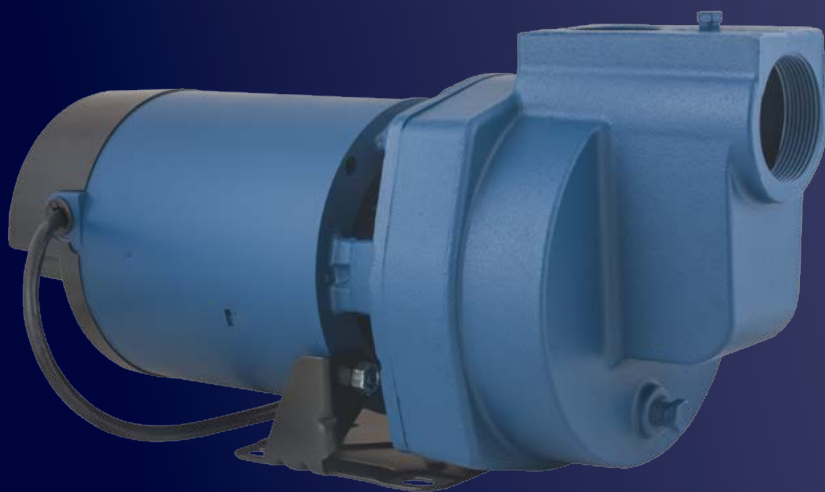

1, 1-1/2 and 2 HP




FLINT & WALLING

Trust runs deep™


Lawn Sprinkling Pumps

Performance Chart												
Model #	HP	Suction Lift (Ft.)	Discharge Pressure (PSI)							Shut Off Pressure @ 0 Lift (PSI)	Suction Pipe	Discharge Pipe
			15	20	25	30	35	40	45			
			Capacity - U.S. Gallons per Minute									
SP10P1	1	5	65	61	53	44	32			39	2 in.	1-1/2 in.
		10	64	58	49	39	24					
		15	62	55	45	34						
		20	59	51	41	28						
		25	56	46	36	2						
SP15P1	1-1/2	5	66	63	59	54	48	40	8	45	2 in.	1-1/2 in.
		10	64	61	57	52	45	28				
		15	63	60	55	49	41	15				
		20	62	58	53	46	32					
		25	60	56	50	42	21					
SP20P1	2	5	70	68	65	62	56	46	24	48	2 in.	1-1/2 in.
		10	69	66	63	60	52	39	6			
		15	68	65	62	57	47	27				
		20	67	64	60	53	41	13				
		25	65	62	58	48	30					

Max. Case Pressure: 100 PSI

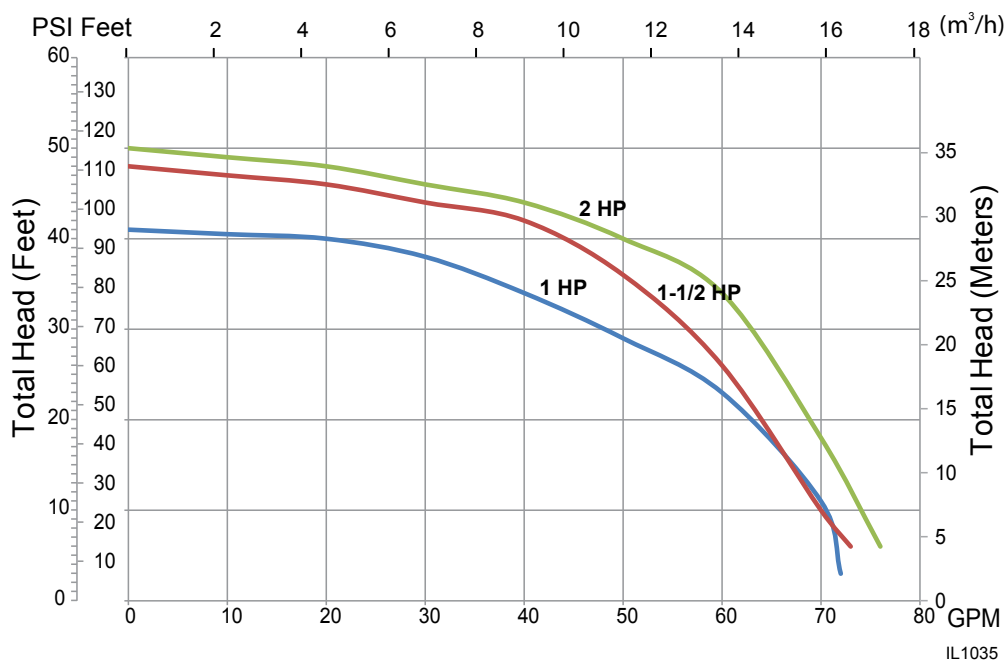

IL1035

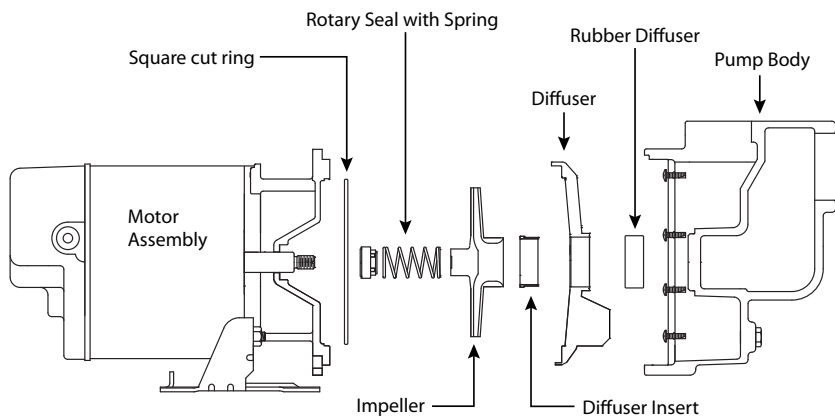

IL1893



FLINT & WALLING

Trust runs deep™